


ZT-3800TM

**WITH INTERNAL
EXPANSION TANK**

REAL BEAUTY IS ON THE INSIDE

- ⚙️ **Faster assembly with reduced parts and fewer leak points**
- ⚙️ **Higher weight capacity for vehicles up to 1800 lb**
- ⚙️ **High-efficiency 12cc pump & 16cc motor**
- ⚙️ **All-steel gear train and improved seals**

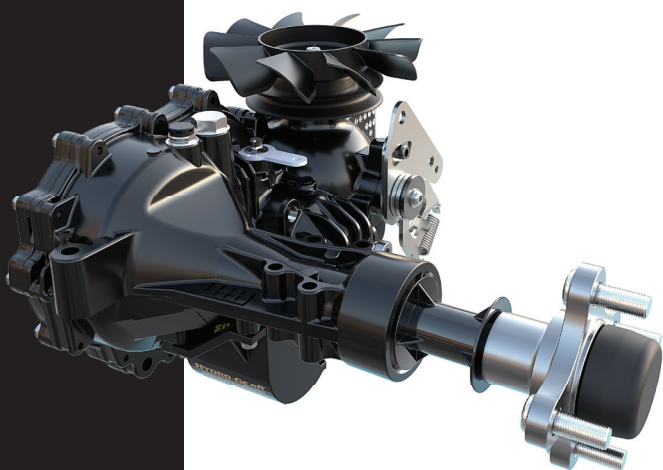

HYDRO-GEAR[®]
COMMERCIAL

DESIGNED & ASSEMBLED IN THE USA

ENGINEERED TO PERFORM

SPECIFICATIONS

Pump Displacement	0.73 in ³ /rev [12 cc/rev]
Motor Displacement	0.97 in ³ /rev [16 cc/rev]
Input Speeds Max Hi-idle (No Load) Min (Loaded)	3600 rpm 1800 rpm
Output Torque	up to 500 lb-ft [up to 677 Nm]
Speed	up to 11 mph [up to 17 kph]
Gross Vehicle Weight	up to 1800 lbs [up to 816 kg]
Axle Shaft Diameter	1.125 in [28.56 mm]
Axle Shaft Options	Tapered 4 or 5 bolt Flange
Weight of Unit	35.8 lbs [16.2 kg]

Specifications subject to change without notice

**FOR MORE INFORMATION VISIT:
WWW.HYDRO-GEAR.COM**



ZT39001E-09/2018-V1