

BIBUS France
www.bibusfrance.fr

Isabelle PRUD'HON
Resp.Gamme LVS
Juin 2021

BIBUS FRANCE

SYSTÈME D'INSPECTION V275-OMRON

BIBUS[®]
////// SUPPORTING YOUR SUCCESS

V275-OMRON

Présentation



V275


Grade et contrôle à
100% de vos étiquettes

<https://industrial.omron.fr/fr/products/v275#videos>




- Présence des éléments graphiques et conformité de forme
- OCR: lecture de caractères
- OCV: vérification des chaînes de caractères
- Grading 1D/2D

Logiciel

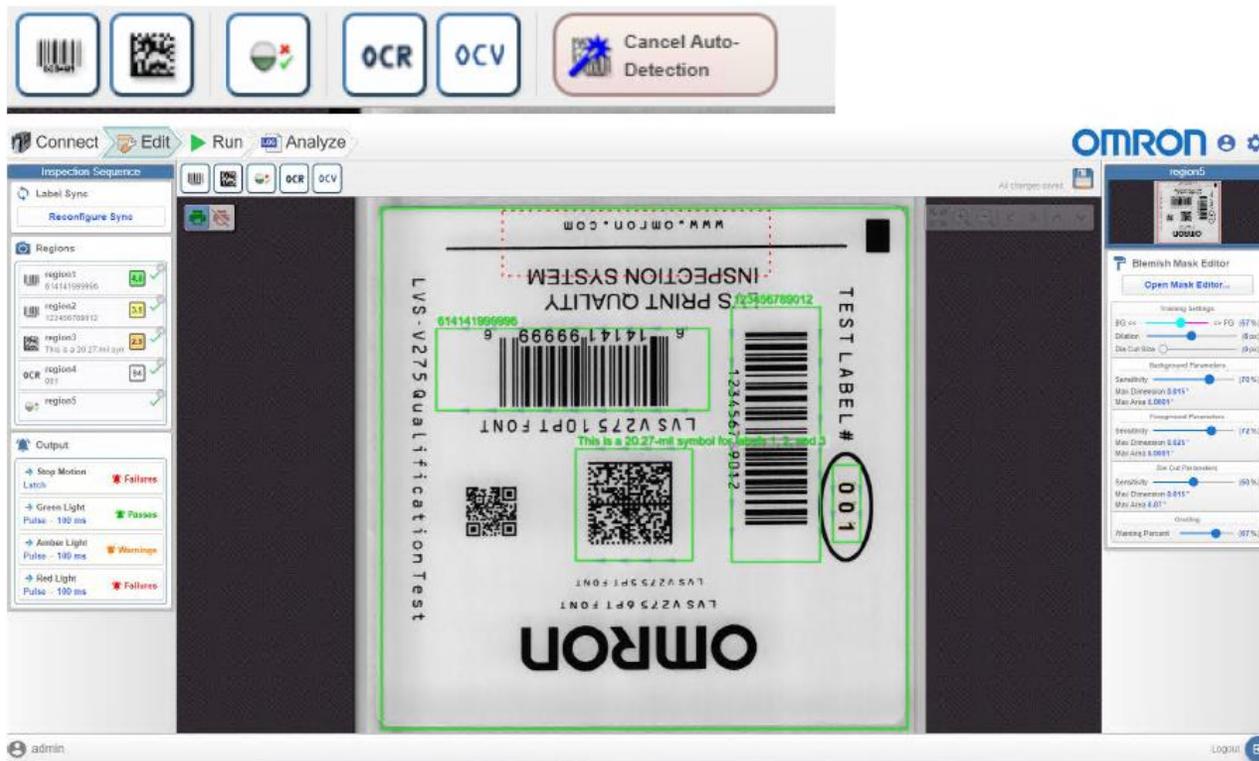


OMRON

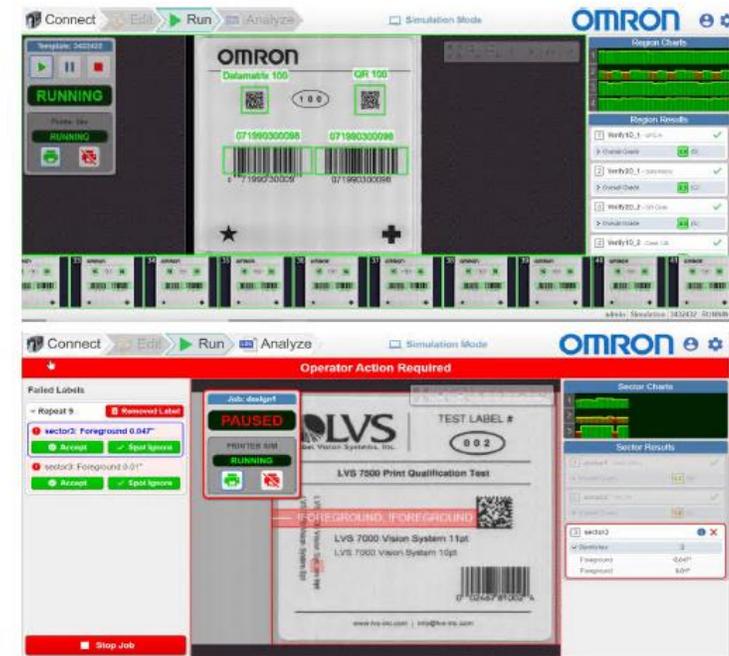

V275-OMRON

Architecture

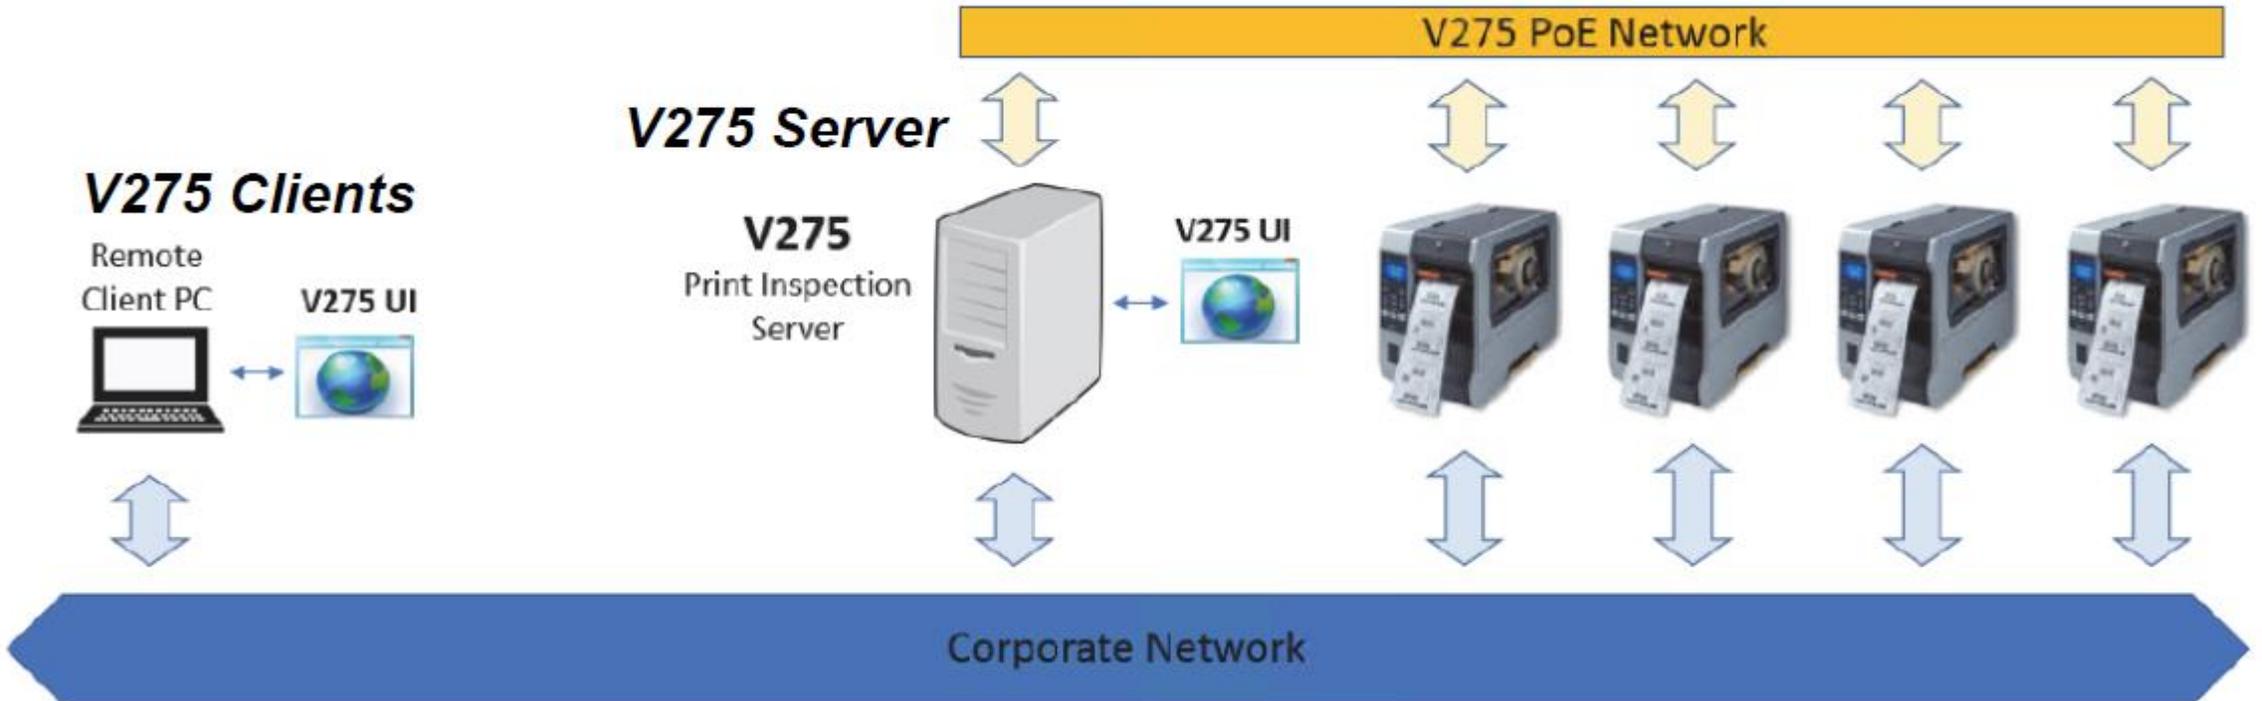

Le V275 est certifié 21 CFR Part 11 et intègre:

- Le support de Microsoft Active Directory
- Une fonction audit trail des actions opérateurs
- Une archive des contrôles réalisés pour chaque étiquette



Tous les résultats d'inspection sont time-stampés et stockés sur le serveur du V275 pour une visualisation ultérieure.

Ils peuvent être exportés sous la forme d'un document pdf ou un report JSON (javascript)

V275-OMRON

Références

Appearance	Description	Part Number
	V275 print quality inspection engine, integrated into a 300-dpi resolution Zebra ZT610 printer. Print and verify labels up to 4.1" wide at speeds up to 12 inches per second.	V275-P46Z61030-CC
	Same as above, with peel and present capability.	V275-P46Z6103P-CC
	V275 print quality inspection engine, integrated into a 600 dpi resolution Zebra ZT610 printer. Print and verify labels up to 4.1" wide at speeds up to 6 inches per second.	V275-P46Z61060-CC
	Same as above, with peel and present capability.	V275-P46Z6106P-CC
	V275 print quality inspection engine, integrated into a 300 dpi resolution Zebra ZT620 printer. Print and verify labels up to 6.6" wide at speeds up to 8 inches per second.	V275-P86Z62030-CC
	Same as above, with peel and present capability.	V275-P86Z6203P-CC

V275-OMRON

Accessoires

Appearance	Description	Part Number
	Light tower for use with the V275. Includes light tower and cable for connecting with Zebra printer.	V275-ALRYGZZT
	Cable for connecting the V275 Zebra printer with a customer-supplied light tower. Cable is 2m long and has flying leads to allow adaptation to almost any light tower. Customer is responsible for connection to the light tower.	V275-ALCBLOZT
	Replacement EAN/UPS Conformance Calibration Standard Test Card for V275 in Zebra ZT610 printer, dated.	V275-ACEAN028
	Replacement EAN/UPS Conformance Calibration Standard Test Card for V275 in Zebra ZT610 printer, undated.	V275-ACEAN028-01
	Replacement EAN/UPS Conformance Calibration Standard Test Card for V275 in Zebra ZT620 printer, dated.	V275-ACEAN029
	Replacement EAN/UPS Conformance Calibration Standard Test Card for V275 in Zebra ZT620 printer, undated.	V275-ACEAN029-01
Image not available	IQ/OQ/PQ Procedure for V275 system with 300DPI printer	V275-APIQOQ03-01
Image not available	IQ/OQ/PQ Procedure for V275 system with 600DPI printer	V275-APIQOQ06-01

V275-OMRON

Liens Documentations - Vidéo

<https://industrial.omron.fr/fr/products/v275#videos>

<https://industrial.omron.fr/fr/products/v275#brochure>

https://assets.omron.eu/downloads/brochure/en/v2/vs123_v275_product_guide_leaflet_en.pdf

merci!